

Priux home 40-25/180 mm
 System: Circulateur standard haut rendement

Item no. of standard version 4170230

Customer

Phone Fax no.

Care of ---
 Salmson

Phone _ Fax no.

Project
 Project no.
 Poste
 Date 2014-05-09
 Page 2 / 7

Requested data


Flow 0 m³/h
 Head 0 m
 Fluid Water, pure
 Fluid temperature 20 °C
 Density 0.9983 kg/dm³
 Kinematic viscosity 1.005 mm²/s
 Vapor pressure 0.02337 bar

Pump data

Make Salmson
 Type Priux home 40-25/180 mm
 Pompe type Single head pump
 Pressure rating PN6
 Min. fluid temperature -10 °C
 Max. fluid temperature 95 °C

Hydraulic data (duty point)

Flow m³/h
 Head m
 Power input P1 kW

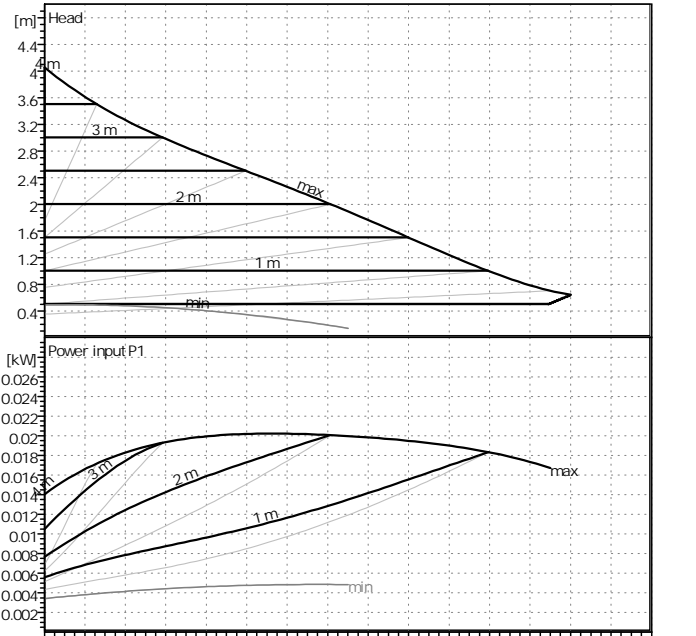

Minimum suction head

Temperature	50	95				°C
Minimum suction head	0,5	3				m

Materials / Shaft seal

Pump housing EN-GJL 200
 Impeller PP + G/F 40 %
 Shaft Stainless steel
 Bearing Metal impregnated carbon

Dimensions per pump mm

--	--	--	--	--	--	--	--

Suction side 1"/G 1½ / PN₆
 Discharge side 1"/G 1½ / PN₆
 Weight 4.5 kg

Motordata per Motor/Pump/

ELClass -
 Rated power P2 0.015 kW
 Power input P1 0.02 kW
 Nominal speed 3600 1/min
 Rated voltage 1~230 V,50 Hz
 Max. currency 0.26 A
 Degree of protection IP X2D
 Permitted voltage tolerance +/- 10%

Item no. of standard version 4170230

Reserves to change any technical data. data status

Software version 3.1.12 - 21.08.2013 (Build 97) User group

FR

Priux home 60-25/180 mm
System: Circulateur standard haut rendement

Item no. of standard version 4170231

Customer

Phone Fax no.
Care of ---
Salmson

Phone _ Fax no.

Project
Project no.
Poste
Date 2014-05-09
Page 3 / 7

Requested data


Flow 0 m³/h
Head 0 m
Fluid Water, pure
Fluid temperature 20 °C
Density 0.9983 kg/dm³
Kinematic viscosity 1.005 mm²/s
Vapor pressure 0.02337 bar

Pump data

Make Salmson
Type Priux home 60-25/180 mm
Pumpe type Single head pump
Pressure rating PN6
Min. fluid temperature -10 °C
Max. fluid temperature 95 °C

Hydraulic data (duty point)

Flow m³/h
Head m
Power input P1 kW

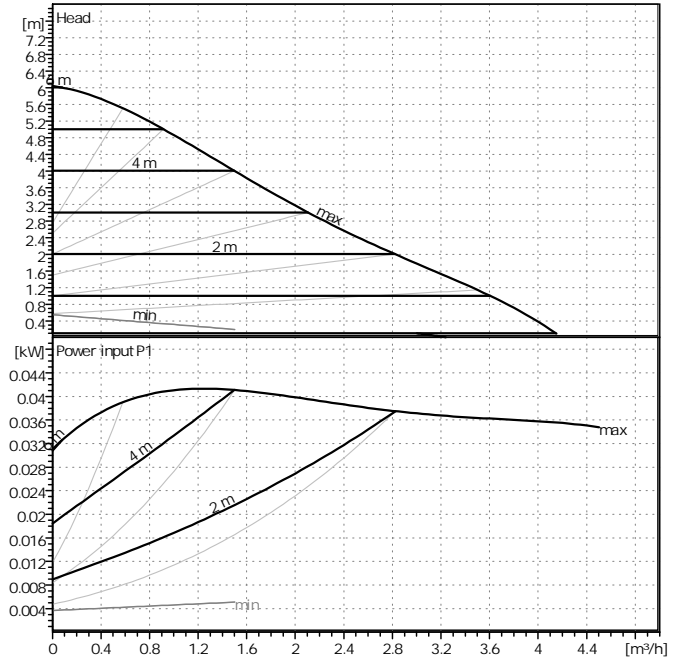

Minimum suction head

Temperature	50	95				°C
Minimum suction head	0,5	3				m

Materials / Shaft seal

Pump housing EN-GJL 200
Impeller PP + G/F 40 %
Shaft Stainless steel
Bearing Metal impregnated carbon

Dimensions per pump

								mm
--	--	--	--	--	--	--	--	----

Suction side 1"/G 1½ / PN₆
Discharge side 1"/G 1½ / PN₆
Weight 4.5 kg

Motordata per Motor/Pump/

ELClass -
Rated power P2 0.03 kW
Power input P1 0.04 kW
Nominal speed 4700 1/min
Rated voltage 1~230 V,50 Hz
Max. currency 0.44 A
Degree of protection IP X2D
Permitted voltage tolerance +/- 10%

Item no. of standard version 4170231

Reserves to change any technical data. data status

Software version 3.1.12 - 21.08.2013 (Build 97) User group

FR

Priux home 80-25/180 mm
 System: Circulateur standard haut rendement

Item no. of standard version 4170232

Customer

Phone

Fax no.

Care of ---

Salmson

Phone -

Fax no.

Project
 Project no.
 Poste
 Date 2014-05-09
 Page 4 / 7

Requested data


Flow 0 m³/h
 Head 0 m
 Fluid Water, pure
 Fluid temperature 20 °C
 Density 0.9983 kg/dm³
 Kinematic viscosity 1.005 mm²/s
 Vapor pressure 0.02337 bar

Pump data

Make Salmson
 Type Priux home 80-25/180 mm
 Pompe type Single head pump
 Pressure rating PN6
 Min. fluid temperature -10 °C
 Max. fluid temperature 95 °C

Hydraulic data (duty point)

Flow m³/h
 Head m
 Power input P1 kW

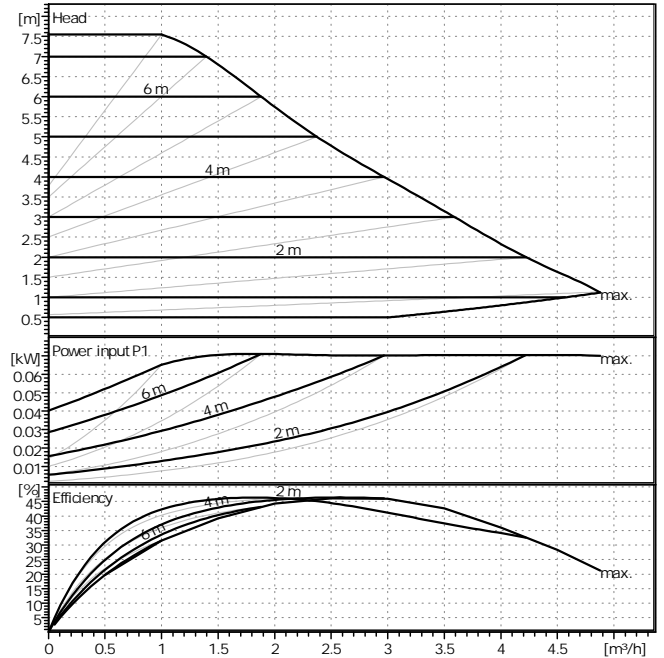

Minimum suction head

Temperature	50	95				°C
Minimum suction head	0.5	3				m

Materials / Shaft seal

Pump housing EN-GJL 200
 Impeller PP + G/F 40 %
 Shaft Stainless steel
 Bearing Metal impregnated carbon

Dimensions per pump

								mm
--	--	--	--	--	--	--	--	----

Suction side 1"/G 1½ / PN₆
 Discharge side 1"/G 1½ / PN₆
 Weight 2.3 kg

Motordata per Motor/Pump/

ELClass -
 Rated power P2 0.05625 kW
 Power input P1 0.075 kW
 Nominal speed 4800 1/min
 Rated voltage 1~230 V,50 Hz
 Max. current 0.66 A
 Degree of protection IP X2D
 Permitted voltage tolerance +/- 10%

Item no. of standard version 4170232

Reserves to change any technical data. data status

Software version 3.1.12 - 21.08.2013 (Build 97) User group

FR

Priux home 40-32/180 mm
System: Circulateur standard haut rendement

Item no. of standard version 4170233

Customer

Phone Fax no.

Care of Salmson

Phone Fax no.

Project
Project no.
Poste
Date 2014-05-09
Page 5 / 7

Requested data


Flow 0 m³/h
Head 0 m
Fluid Water, pure
Fluid temperature 20 °C
Density 0.9983 kg/dm³
Kinematic viscosity 1.005 mm²/s
Vapor pressure 0.02337 bar

Pump data

Make Salmson
Type Priux home 40-32/180 mm
Pumpe type Single head pump
Pressure rating PN6
Min. fluid temperature -10 °C
Max. fluid temperature 95 °C

Hydraulic data (duty point)

Flow m³/h
Head m
Power input P1 kW

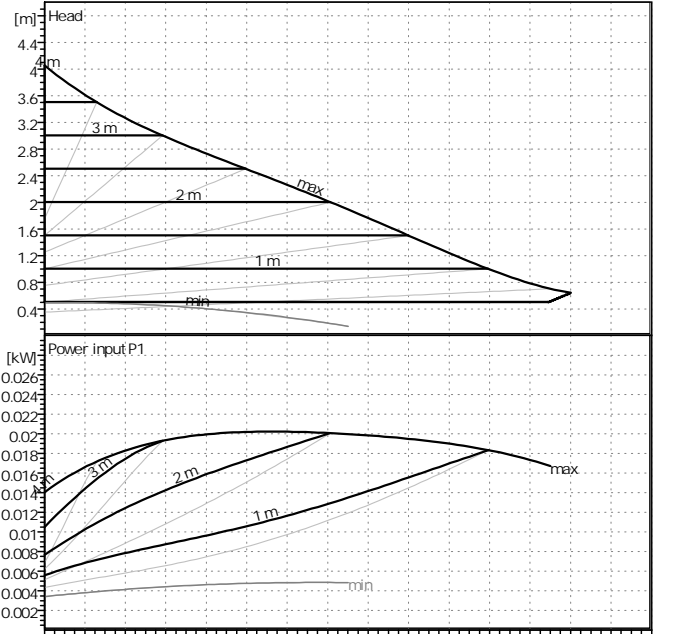

Minimum suction head

Temperature	50	95				°C
Minimum suction head	0,5	3				m

Materials / Shaft seal

Pump housing EN-GJL 200
Impeller PP + G/F 40 %
Shaft Stainless steel
Bearing Metal impregnated carbon

Dimensions per pump mm

--	--	--	--	--	--	--	--

Suction side 1 1/2" / G 2 / PN₆
Discharge side 1 1/2" / G 2 / PN₆
Weight 2.2 kg

Motordata per Motor/Pump/

ELClass -
Rated power P2 0.015 kW
Power input P1 0.02 kW
Nominal speed 3600 1/min
Rated voltage 1~230 V,50 Hz
Max. currency 0.26 A
Degree of protection IP X2D
Permitted voltage tolerance +/- 10%

Item no. of standard version 4170233

Reserves to change any technical data. data status

Software version 3.1.12 - 21.08.2013 (Build 97) User group

FR

Priux home 60-32/180 mm
System: Circulateur standard haut rendement

Item no. of standard version 4170234

Customer

Phone

Fax no.

Care of
Salmson

Phone

Fax no.

Project

Project no.

Poste

Date 2014-05-09

Page 6 / 7

Requested data


Flow 0 m³/h
Head 0 m
Fluid Water, pure
Fluid temperature 20 °C
Density 0.9983 kg/dm³
Kinematic viscosity 1.005 mm²/s
Vapor pressure 0.02337 bar

Pump data

Make Salmson
Type Priux home 60-32/180 mm
Pumpe type Single head pump
Pressure rating PN6
Min. fluid temperature -10 °C
Max. fluid temperature 95 °C

Hydraulic data (duty point)

Flow m³/h
Head m
Power input P1 kW

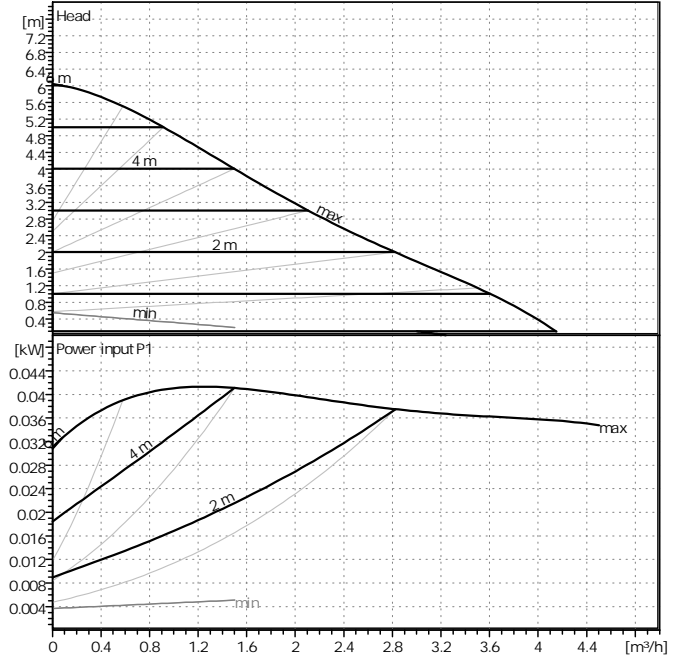

Minimum suction head

Temperature	50	95				°C
Minimum suction head	0,5	3				m

Materials / Shaft seal

Pump housing EN-GJL 200
Impeller PP + G/F 40 %
Shaft Stainless steel
Bearing Metal impregnated carbon

Dimensions per pump

mm

--	--	--	--	--	--	--	--

Suction side 1 1/2" / G 2 / PN₆
Discharge side 1 1/2" / G 2 / PN₆
Weight 2.2 kg

Motordata per Motor/Pump/

ELClass -
Rated power P2 0.03 kW
Power input P1 0.04 kW
Nominal speed 4700 1/min
Rated voltage 1~230 V, 50 Hz
Max. currency 0.44 A
Degree of protection IP X2D
Permitted voltage tolerance +/- 10%

Item no. of standard version 4170234

Reserves to change any technical data. data status

Software version 3.1.12 - 21.08.2013 (Build 97) User group

FR

Priux home 80-32/180 mm
System: Circulateur standard haut rendement

Item no. of standard version 4170235

Customer

Phone


Fax no.

Care of

Salmsion

Phone

Fax no.

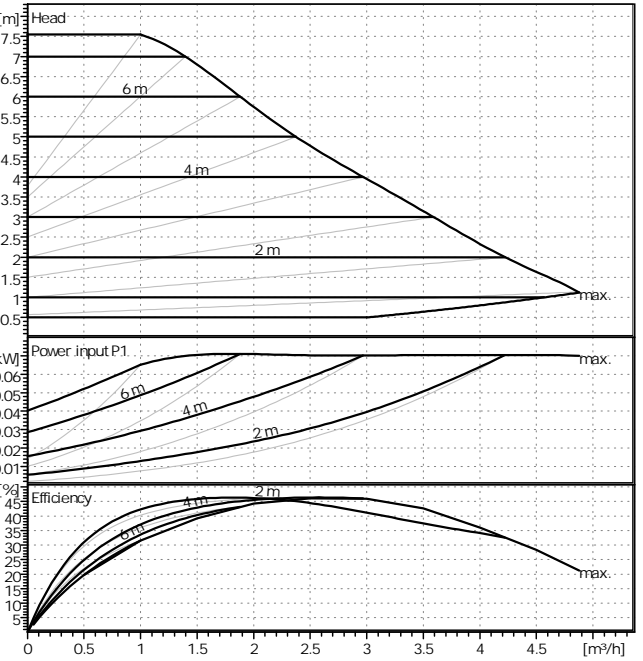

Requested data

Flow	0	m ³ /h
Head	0	m
Fluid	Water, pure	
Fluid temperature	20	°C
Density	0.9983	kg/dm ³
Kinematic viscosity	1.005	mm ² /s
Vapor pressure	0.02337	bar

Pump data

Make	Salmsion	
Type	Priux home 80-32/180 mm	
Pumpe type	Single head pump	
Pressure rating	PN6	
Min. fluid temperature	-10	°C
Max. fluid temperature	95	°C

Hydraulic data (duty point)

Flow		m ³ /h
Head		m
Power input P1		kW

Minimum suction head

Temperature	50	95			°C
Minimum suction head	0.5	3			m

Materials / Shaft seal

Pump housing	EN-GJL 200
Impeller	PP + G/F 40 %
Shaft	Stainless steel
Bearing	Metal impregnated carbon

Dimensions per pump

mm							

Suction side	1 1/2" / G 2	/ PN ₆
Discharge side	1 1/2" / G 2	/ PN ₆
Weight	2.3	kg

Motordata per Motor/Pump/

ELClass	-	
Rated power P2	0.05625	kW
Power input P1	0.075	kW
Nominal speed	4800	1/min
Rated voltage	1~230 V, 50	Hz
Max. current	0.66	A
Degree of protection	IP X2D	
Permitted voltage tolerance	+/- 10%	

Item no. of standard version 4170235